


# ATRT-03B

Automatic Turns Ratio Tester



**Vanguard Instruments Company**  
[www.vanguard-instruments.com](http://www.vanguard-instruments.com)

# Automate

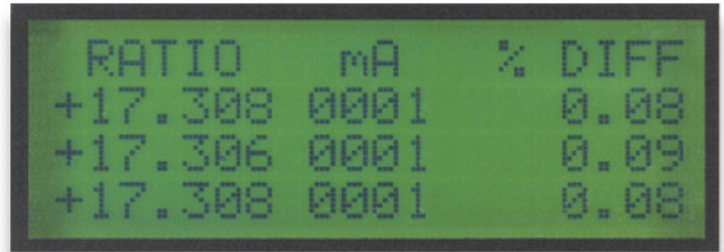

RATIO	mA	% DIFF
+17.308	0001	0.08
+17.306	0001	0.09
+17.308	0001	0.08

The ATRT-03B can also calculate the turns-ratio percentage error if the transformer's nameplate voltages are provided. The baseline turns-ratio is calculated using the nameplate voltages, and the test results are compared to the baseline turns-ratio. The percentage error is then calculated from the difference between the baseline and test turns-ratios.

## **User Interface**

The ATRT-03B features a back-lit LCD screen (20 characters by 4 lines) that is viewable in both bright sunlight and low-light levels. The test results screen displays the transformer turns-ratio, excitation current, and turns-ratio accuracy. The unit is controlled via a rugged, 16-key, membrane keypad.

## **Internal Test Record Storage**

Up to 200 test records can be stored in the ATRT-03B's Flash EEPROM memory. Each test record may contain up to 99 turns-ratio, excitation current, phase angle, and nameplate voltage readings. Test records can be recalled locally or transferred to a PC via the RS-232C interface.

## **Transformer Test Plan Storage**

The ATRT-03B can store up to 128 transformer test-plans in its Flash EEPROM. A test plan is comprised of the transformer nameplate voltages for each tap setting. The calculated turns-ratio based on the nameplate voltages is compared with the measured turns-ratio. By recalling a test plan, a transformer can be quickly tested and turns-ratio Pass/Fail reports can be reviewed. Test plans can be created with the included PC software and can be transferred to the ATRT-03B via the RS-232C interface.

## **Computer Interface**

The ATRT-03B can be computer-controlled via the RS-232C interface using the supplied PC software. The Windows® XP/Vista-based software can be used to run a test and to store test results on a PC. Test results can also be exported to Microsoft® Excel.

## **Transformer Load Tap Changer Control**

An optional Tap-Changer Remote Control Box can be used to remotely change transformer taps. This remote-controlled tap-changer box eliminates the need to manually change the transformer's step-up and step-down taps.



# ATRT-03B

## **Automatic, Three-Phase Turns-Ratio Tester**

The ATRT-03B is Vanguard's second generation, microprocessor-based, automatic, three phase, transformer turns-ratio tester. This lightweight, portable unit is designed for testing transformers at utility power substations.

The ATRT-03B determines the transformer turns-ratio using the IEEE C57.12.90 measurement method. The transformer turns-ratio (ranging from 0.8 to 15,000) is determined by precisely measuring the voltages across the unloaded transformer windings. To ensure accuracy, the ATRT-03B's measuring circuitry self-calibrates before each measurement. It requires neither adjustment nor temperature compensation. The ATRT-03B's turns-ratio measurement accuracy is 0.1% or better.


The ATRT-03B can perform a specific test for each transformer type (such as single phase, delta to Y, Y to delta, delta to delta, or Y to Y) without the need to switch test hookup cables. Also, the unit's automatic transformer phase detection feature can detect different transformer vector diagrams. The ATRT-03B can automatically detect and test 67 transformer types defined by ANSI, CEI/IEC and Australian standards.

To prevent an accidental wrong test-lead hook-up (e.g., when the operator reverses H and X leads), the ATRT-03B outputs a low-level test voltage to verify the hook-up condition before applying the full test voltage to the transformer. Three test voltages (8 Vac, 40 Vac, 100 Vac) allow the ATRT-03B to test CT's and PT's, as well as power transformers.

In addition to measuring a transformer's turns-ratio, the ATRT-03B can also measure a transformer's excitation current (in milli-amperes) and its winding phase angle.

# Automatic Three-Phase Turns-

# the Tedious Procedure of Transformer Turns-Ratio Testing

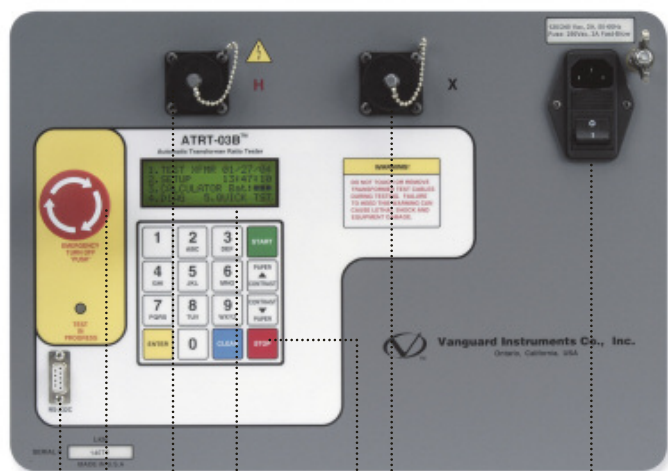

RS-232C Interface    Emergency Turn-Off    Back-lit LCD Screen (20 characters by 4 lines)    Connector for X Terminals    Power Switch

Connector for H Terminals    Rugged, 16-Key Membrane Keypad

## PC Printer Output

Test Results - Page 01 of 2

Date: Aug 05, 2009 Time: 07:08 PM    SUFF:    GE:     
 Device Type: Transformer    Type: V to Delta     
 Company: WAFB    Model: C8301703     
 Location: JACKSON    Serial #: 31776     
 Operator: RAJ NGUYEN    Max Deviation %: -5     
 File Name: A3C8301703

Comment:    Test Info:

WIND	PHASE	N VOLT	H TAP	X VOLT	H TAP	DIFF. RATIO	INDIC. RATIO	DIFF. %	WIND	PHASE	N VOLT	H TAP	X VOLT	H TAP	DIFF. RATIO	INDIC. RATIO	DIFF. %	WIND	PHASE	N VOLT	H TAP	X VOLT	H TAP	DIFF. RATIO	INDIC. RATIO	DIFF. %
1	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
2	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
3	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
4	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
5	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
6	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
7	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
8	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
9	A 95-00/01-02	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	3	16,416	3	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
10	A 95-00/01-02	210,000	4	16,416	4	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	B 95-00/02-03	210,000	4	16,416	4	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						
	C 95-00/03-01	210,000	4	16,416	4	0.020	0.020	0.00	P	15,000	1.00							P	15,000	1.00						

## Ordering Information

ATRT-03B, Three Phase Transformer Turns-Ratio Tester  
 ATRT-03B, with Cables, PC Software  
 ATRT-03B Carrying Case  
 Load Tap Changer Controller

Part No: ATRT-03B  
 Part No: ATRT-03B Case  
 Part No: LTC Controller

## SPECIFICATIONS

### PHYSICAL SPECIFICATIONS

TYPE: Portable, lightweight, automatic, three-phase transformer turns-ratio meter  
 17"W x 7"H x 13"D (43.2cm x 17.8 cm x 33.0 cm); Weight: 13 lbs (5.9 kg)

### INPUT POWER

3 amps, 100 – 120 Vac or 200 – 240 Vac (selectable), 50/60 Hz

### MEASUREMENT METHOD

ANSI/IEEE C57.12.90

### RATIO-MEASURING RANGE

0.8 – 15,000 (5-digit resolution)

### TURNS-RATIO ACCURACY

0.8 – 1999: ±0.1%, 2,000 – 3,999: ±0.25%, 4,000 – 15,000: ±1% @ 8 Vac  
 0.8 – 1999: ±0.1%, 2,000 – 3,999: ±0.20%, 4,000 – 15,000: ±1% @ 40 Vac  
 0.8 – 1999: ±0.1%, 2,000 – 3,999: ±0.15%, 4,000 – 15,000: ±1% @ 100 Vac

### ADJUSTMENT

None required

### TEST VOLTAGES

8 Vac @ 1 amp, 40 Vac @ 0.6 amp, 100 Vac @ 0.1 amp

### EXCITATION CURRENT READING RANGE

0 – 2 Amperes; Accuracy: ±1mA, ±2% of reading (±1 digit)

### PHASE-ANGLE MEASUREMENT

0 – 360 degrees; Accuracy: ±0.2 degrees (±1 digit)

### DISPLAY

Back-lit LCD screen (20 Characters by 4 Lines); Viewable in bright sunlight and low-light levels

### COMPUTER INTERFACE

RS-232C (19,200 baud) port

### PC SOFTWARE

Windows® XP/Vista-based Transformer Turns-Ratio Analyzer application is included with purchase price

### INTERNAL TEST RECORD STORAGE

Stores 200 complete transformer test records. Each test record includes nameplate voltage, winding turns-ratios, excitation current, and winding phase angle

### INTERNAL TEST PLAN STORAGE

Stores up to 128 transformer test plans

### SAFETY

Designed to meet UL 61010A-1 and CAN/CSA C22.2 No. 1010.1-92 standards

### ENVIRONMENT

Operating: -10° to 50° C (15° to +122° F); Storage: -30° C to 70° C (-22° to +158° F)

### HUMIDITY

90% RH @ 40°C (104°F) non-condensing

### ALTITUDE

2,000m (6,562 ft) to full safety specifications

### CABLES

One 15-foot single-phase cable set, One 15-foot 3-phase cable set, One 25-foot extension cable set, One cable-carrying duffel bag included

### OPTIONS

Transportation case, transformer tap-changer remote control device

### WARRANTY

One year on parts and labor

Note: The above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.

# Ratio Tester

Vanguard Instruments Company  
 Reliability Through Instrumentation

### **Vanguard Instruments Company, Inc.**

Vanguard Instruments Co., (VIC), was founded in 1991. Currently, our 28,000 square-foot facility houses Administration, Design & Engineering, and Manufacturing operations. From its inception, VIC's vision was, and is to develop and manufacture innovative test equipment for use in testing substation EHV circuit breakers and other electrical apparatus.

The first VIC product was a computerized circuit-breaker analyzer, which was a resounding success. It became the forerunner of an entire series of circuit-breaker test equipment. Since its beginning, VIC's product line has expanded to include microcomputer-based, precision micro-ohmmeters, single and three-phase transformer winding turns-ratio testers, winding-resistance meters, transformer tap-changing controllers, megaohm resistance meters, and a variety of other electrical utility maintenance support products.

VIC's performance-oriented products are well suited for the utility industry. They are rugged, reliable, accurate, user friendly, and most are computer controlled. Computer control, with innovative programming, provides many automated testing functions. VIC's instruments eliminate tedious and time-consuming operations, while providing fast, complex, test-result calculations. Errors are reduced and the need to memorize long sequences of procedural steps is eliminated. Every VIC instrument is competitively priced and is covered by a liberal warranty.

**Vanguard products are available from:**



**Vanguard Instruments Company, Inc.**

1520 S. Hellman Ave. • Ontario, California 91761 USA • P 909-923-9390 • F 909-923-9391  
[www.vanguard-instruments.com](http://www.vanguard-instruments.com)